COMMERCIAL/INDUSTRIAL

- Final color selection should be made from actual color chips.
- For the most current information available, visit our website at www.mbci.com.
- See the product selection chart for gauge and finish availability.
- All products are available in smooth or embossed finish.
- Trim is available in all colors.
- Review the sample warranty for complete performance attributes and terms and conditions.

SIGNATURE® 200

STANDARD COLORS 26- AND 24-GAUGE MATERIAL

Siliconized Polyester

Polar White is a Straight Polyester.

- * Also available in 29-gauge
- ** Minimum quantities and/or extended lead times required for 24-gauge. Please inquire.



SIGNATURE® 300

STANDARD COLORS

26-GAUGE MATERIAL
PBR, PBU, AVP, PBC, PBD
PANELS ONLY

SR .70 SRI 85

- * Also available in 24-gauge
- ** Minimum quantities and/or extended lead times required for 24-gauge. Please inquire.
- † Minimum quantities and/or extended lead times required for all gauges. Please inquire.







SOLAR REFLECTIVITY (SR)

Solar reflectivity or reflectance (SR) is the ability of a material to reflect solar energy from its surface back into the atmosphere. The SR value is a number from 0 to 1.0. A value of 0 indicates that the material absorbs all solar energy and a value of 1.0 indicates it is all reflected. ENERGY STAR® requires SR testing of both new and aged roof products. New products must have an SR value of 0.25 or higher for steep slope (above 2:12) roofing and an SR value of 0.65 or higher for low slope (2:12 or less) roofing. Aged testing takes three years to complete, so not all products that meet the initial requirements are qualified. For more information, please visit www.energystar.gov.




The SRI is used to determine compliance with LEED requirements and is calculated according to ASTM E 1980 using values for reflectance and emissivity. Emissivity is a material's ability to release absorbed energy. To meet LEED requirements, a roofing material must have an SRI of 29 or higher for steep slope (above 2:12) roofing and an SRI value of 78 or higher for low slope (2:12 or less) roofing. For more information, please visit www.usgbc.org.



PANEL PROFILE	Panel	29 GAUGE		26 GAUGE			24 GAUGE			22 GAUGE		
		Galvalume Plus	Sig 200	Galvalume Plus	Sig 200	Sig 300	Galvalume Plus	Sig 200	Sig 300	Galvalume Plus	Sig 200	Sig 300
36" 11/4" 11/4" 11/4"	PBR	•	•	•	•	•	•	-	•	•	-	•
*6"+ 36"	PBU	•	•	•	•	•	•	•	-	•	•	-
32" 7/6" 7/6" 7/6" 7/6" 7/6" 7/6" 7/6" 7/6	PBC	•	-	•	•	•	•	•	-	•	•	-
32" 5%" 5%" # PANEL	PBD	•		•	•	•	•	•	•	•		•
7.2 PANEL	7.2	•	•	•	•	•	•	•	-	•	•	-
** 12" ** 36" ** 1"	AVP	•	•	•	•	•	•	•	•	•	-	•

Available in any quantity


May require minimum quantity

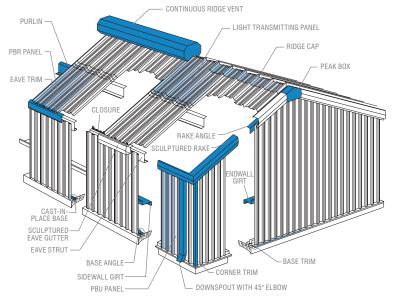

AVAILABLE ACCESSORIES

- Hat and Channel Sections
- Light Transmitting Panels
- Vents
- Roof Jacks
- Fasteners
- Ridge Caps
- Closures
- Doors

- Windows
- Sealants
- Insulation
- Bracing
- Bolts
- Sliding Door Hardware



Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, MBCI reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at MBCI.com.

FOR THE MOST CURRENT INFORMATION AVAILABLE, VISIT OUR WEBSITE AT WWW.MBCI.COM

Houston, TX | 877.713.6224 Adel, GA | 888.446.6224 Atlanta, GA | 877.512.6224 Atwater, CA | 800.829.9324 Ennis, TX | 800.653.6224 Indianapolis, IN | 800.735.6224 Lubbock, TX | 800.758.6224 Memphis, TN | 800.206.6224 Oklahoma City, OK | 800.597.6224 Phoenix, AZ | 888.533.6224 Rome, NY | 800.559.6224 Salt Lake City, UT | 800.874.2404 San Antonio, TX | 800.598.6224

